ELEVATION CERTIFICATE

PEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

| | | . 3 | | i rue tollowing l | pages. | |
|---|--|--|--|---|---|--|
| BUILDING OWNER'S NAME | SECTION A PR | OPERTY INFO | DRMATION | | FOR INSURANCE COMPANY USE | |
| MEFERRED | BULLERS | , | | | POLICY NUMBER | |
| STREET ADDRESS (Including Ap | t., Unit, Suite and/or Bldg. | Number) OR P.O. | ROUTE AND BOX NUMBER | | COMPANY NAIC NUMBER | |
| OTHER DESCRIPTION (Lot and E | Block Numbers, etc.) | , , | | | | |
| CITY 14 | 45E 11, K | chmons | PLACE | | | |
| Kichmans | HICC | | | STATE | ZIP CODE 3/374 | |
| Provide the fell is | SECTION B FL | OOD INSURA | ANCE RATE MAP (FIRM) | INFORMATION | | |
| Provide the following from the proper FIRM (See Instructions): | | | | | | |
| 1. COMMUNITY NUMBER | 2. PANEL NUMBER | 3. SUFFIX | 4. DATE OF FIRM INDEX | 5. FIRM ZONE | 6. BASE FLOOD ELEVATION | |
| 130018 | 0001 | 13 | APRIL 17, 1984 | A | (In AO Zones, use depth) | |
| 7. Indicate the elevation datu 8. For Zones A or V, where n the community's BFE: | m system used on the BFE is provided or LUZ. Preet No. | ne FIRM for Ba n the FIRM, an GVD (or other | ise Flood Elevations (BFE d the community has esta FIRM datum-see Section | i): NGVD '29 ablished a BFE fo B, Item 7) | Other (describe on back) or this building site, indicate | |
| | | | NG ELEVATION INFORM | | | |
| below (check one) to (d). FIRM Zone AO. The floone) the highest grade a level) elevated in accord. Indicate the elevation daturunder Comments on Page the FIRM [see Section B, equation under Comments. Elevation reference mark us. The reference level elevation (NOTE: Use of construction) | at an elevation of L. at an elevation of L. at an elevation of L. FE). The floor used the highest grade adjacent to the building ance with the community system used in detail (NOTE: If the election Page 2.) sed appears on FIRM on is based on: | The bottom of the bottom of the bottom of the bottom of the bunce level from g. If no flood of the continuity's floodplate ermining the action datum the elevations. The bottom of the bunch of the bottom of the between the construction of the bottom of the construction of the bottom of the botto | f the lowest horizontal structed feet NGVD (or other FIRM ce level from the selected diagram is depth number is available in management ordinance bove reference level elevations on the detail of the datum system used in measuring the elected for the datum system used in measuring the constructions on the construction of the datum construction draws in the least of the datum construction of the datum construction draws in the lower constructio | datum—see Sed diagram is | of the reference level from ction B, Item 7). determined feet above or or ove or or below (check lowest floor (reference lood) Unknown determined feet above on or oversion | |
| case this certificate will only will be required once constru | be valid for the build liction is complete.) | ing during the | ng does not yet have the r course of construction. A | wings reference level flo post-construction | oor in place, in which n Elevation Certificate | |
| The elevation of the lowest grade immediately adjacent to the building is: LLLB. Feet NGVD (or other FIRM datum-see Section B, Item 7). | | | | | | |
| | SEC | TION D COM | MUNITY INFORMATION | | | |
| If the community official respire not the "lowest floor" as defined by the ordinal of the start of constructions. | oonsible for verifying efined in the commun nance is: | building elevat nity's floodplair | | erence level indic | IDP bluiding's "lowest | |


SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features–If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

| CERTIFIER'S NAME | LICENSE NUMBER (or Affix Seal) |
|--|--|
| INMAN L. CANIER, JR. | 2397 |
| THIE COM | IPANY NAME |
| LANER LAND HoweyIn | CG INC. |
| P.O. Box 92 Picha | 1 ons HILL EA. 31374 |
| SIGNATURE | 3-25-99 912-758-4366 |
| Copies should be made of this Certificate for: 1) communit | y official, 2) insurance agent/company, and 3) building owner. |
| COMMENTS: MGUD 88 | |
| | |
| | |
| | |
| | |

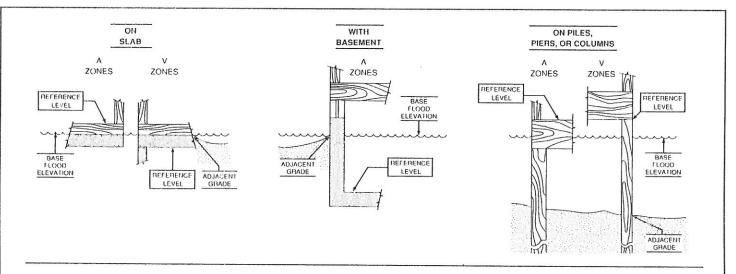

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.